

BARRICADE

SACRIFICIAL ANTI-GRAFFITI COATING FOR PAINTED & MASONRY SURFACES

BARRICADE ANTI-GRAFFITI

Barricade Anti-Graffiti is a specially formulated water-based coating that resists graffiti and does not allow either spray paint or marker pen to penetrate and damage the surface.

Its crystal clear matt finish is the ideal for protection of Painted Surfaces and masonry such as concrete, brickwork, limestone and sandstone to preserve their natural beauty.

Barricade also has biocidal protection that helps prevent fungal growth and mildew.

Overall Barricade's strong UV and weather resistance prevents yellowing and will not crack or peel.



Anti-Graffiti



Barricade Protects:

- **Painted Surfaces**
- **Concrete**
- **Stone**
- **Brick**



BARRICADE PROPERTIES

- IDEAL FOR MANY SURFACES
- RESISTS HEAVY GRAFFITI
- CRYSTAL CLEAR FINISH
- BIOCIDAL PROTECTION
- WATER BASED
- ENVIRONMENTALLY FRIENDLY

EASY TO USE PROTECTION


Barricade Anti-Graffiti has been specially developed to protect painted surfaces, concrete, brick and stone. It also protects wood, cement blockwork, render and even rammed earth from graffiti damage. Graffiti is easily removed using common removers or steam removal with the Barricade simply being re-applied for further protection.

Note: Limestone should be sealed with 1 coat of H-100 Silane due to its porous nature. Allow to dry for 24 hours prior to applying Barricade Anti-Graffiti.

APPLICATION

Barricade can be applied by roller, brush or spray using a flood method. The overall finish is crystal clear matt that makes application quite simple with roller and brush marks almost imperceptible.

Sizes:
4 & 20 Litre

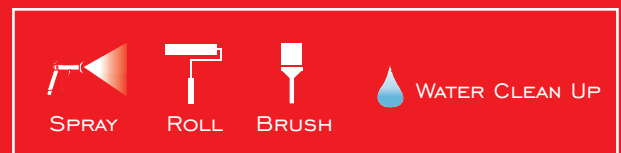



HYDRON BARRICADE

Sacrificial Anti-Graffiti Coating for Painted & Masonry Surfaces

■ PRODUCT DATA SHEET ■

REMOVABLE GRAFFITI PROTECTION FOR

- PAINTED SURFACES
- CONCRETE
- BRICK
- RENDER
- LIMESTONE
- SANDSTONE
- CEMENT BLOCKWORK
- RAMMED EARTH WALLS
- COMPRESSED FIBRE CEMENT
- WOOD

SURFACE PREPARATION

ENSURE ALL SURFACES ARE CLEAN AND FREE FROM DIRT, OILS, RESIDUE, FORM RELEASE AGENTS, SILICONE OR OTHER CONTAMINANTS. LET SURFACES DRY AFTER CLEANING. ALL PAINTED SURFACES MUST BE ALLOWED TO CURE FOR AT LEAST 7 DAYS PRIOR TO COATING WITH HYDRON BARRICADE. SOFT STONE SUCH AS LIMESTONE SHOULD BE STRENGTHENED WITH BARRICADE STONE STRENGTHENER AND ALLOWED TO DRY OVERNIGHT.

WEATHER

CAUTION - DO NOT APPLY BARRICADE IF RAIN IS EXPECTED WITHIN 12 HOURS. DO NOT APPLY IF TEMPERATURE IS BELOW 10°C OR RH IS ABOVE 85%.

HEALTH & SAFETY

AVOID CONTACT WITH SKIN AND EYES. WEAR PROTECTIVE GOGGLES AND RUBBER GLOVES. USE WITH ADEQUATE VENTILATION.

LOW-POROSITY SURFACES

APPLICATION

- APPLY 2 COATS OF HYDRON BARRICADE BY ROLLER, BRUSH OR SPRAY TAKING CARE TO AVOID DRIPS AND RUNS. ALLOW THE FIRST COAT TO DRY BY NO MORE THAN 1/2 AN HOUR BEFORE RE-COATING.

COVERAGE

PAINTED SURFACES
APPROX: 10 - 15 SQ METRES/LITRE.
CONCRETE & BRICK
APPROX: 6 - 10 SQ METRES/LITRE.
OTHER SURFACES
APPROX: 6 - 15 SQ METRES/LITRES.
DEPENDING ON POROSITY.

GRAFFITI REMOVAL

PAINTED & SOFT SURFACES: USE MILD CHEMICAL REMOVERS AND SOFT SCRUBBING EQUIPMENT.
HARDER SURFACES: REMOVAL CAN BE PERFORMED USING HIGH PRESSURE HOT WATER CLEANING EQUIPMENT OR MILD CHEMICALS. ENSURE SURFACES ARE DRY BEFORE RE-COATING.

HIGH-POROSITY SURFACES

APPLICATION

- APPLY 2-3 COATS OF HYDRON BARRICADE BY ROLLER, BRUSH OR SPRAY USING A FLOOD METHOD. ALLOW THE FIRST COAT TO DRY FOR 2 HOURS BEFORE RE-COATING.

COVERAGE

LIMESTONE, RENDER & RAMMED EARTH
APPROX: 3 SQ METRES/LITRE,
DEPENDING ON POROSITY.

GRAFFITI REMOVAL

REMOVAL SHOULD BE PERFORMED USING HIGH PRESSURE HOT WATER CLEANING EQUIPMENT. EXTREME CARE SHOULD BE TAKEN TO NOT ETCH AND DAMAGE SOFT SURFACES SUCH AS LIMESTONE AND RAMMED EARTH WHEN USING HIGH PRESSURE EQUIPMENT. ENSURE SURFACES ARE DRY BEFORE RE-COATING.



SPRAY



ROLL



BRUSH



WATER CLEAN UP

